


TUBOS PVC PARA INSTALACIONES DE DRENAJE Y ALCANTARILLADO

FABRICADOS DE ACUERDO A NORMAS TÉCNICAS PERUANAS NTP - ISO 4435

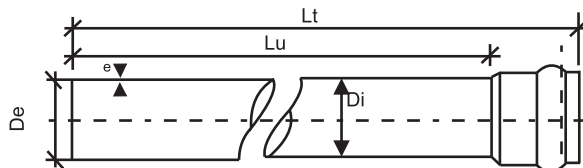

SN 2 (SERIE 25) SDR=51

DIÁMETRO NOMINAL Dn (mm)	DIÁMETRO EXTERIOR De (mm)	ESPESOR e (mm)	DIÁMETRO INTERIOR Di (mm)	PESO APROX. (Kg)	LONGITUD TOTAL Lt (m)	LONGITUD ÚTIL Lu (m)
160,0	160,0	3,2	153,6	13,900	6,0	5,82
200,0	200,0	3,9	192,2	21,10	6,0	5,80
250,0	250,0	4,9	240,2	33,00	6,0	5,76
315,0	315,0	6,2	302,6	52,80	6,0	5,74
355,0	355,0	7,0	341,0	67,00	6,0	5,72
400,0	400,0	7,9	384,2	86,00	6,0	5,70

SN 4 (SERIE 20) SDR=41

DIÁMETRO NOMINAL Dn (mm)	DIÁMETRO EXTERIOR De (mm)	ESPESOR e (mm)	DIÁMETRO INTERIOR Di (mm)	PESO APROX. (Kg)	LONGITUD TOTAL Lt (m)	LONGITUD ÚTIL Lu (m)
110,0	110,0	3,2	103,6	9,80	6,0	5,85
160,0	160,0	4,0	152,0	17,20	6,0	5,82
200,0	200,0	4,9	190,2	26,50	6,0	5,80
250,0	250,0	6,2	237,6	41,70	6,0	5,76
315,0	315,0	7,7	299,6	65,30	6,0	5,74
355,0	355,0	8,7	337,6	83,00	6,0	5,72
400,0	400,0	9,8	380,4	105,60	6,0	5,70

SN 8 (SERIE 16,7) SDR=34

DIÁMETRO NOMINAL Dn (mm)	DIÁMETRO EXTERIOR De (mm)	ESPESOR e (mm)	DIÁMETRO INTERIOR Di (mm)	PESO APROX. (Kg)	LONGITUD TOTAL Lt (m)	LONGITUD ÚTIL Lu (m)
110,0	110,0	3,2	103,6	9,80	6,0	5,85
160,0	160,0	4,7	150,6	20,00	6,0	5,82
200,0	200,0	5,9	188,2	31,30	6,0	5,80
250,0	250,0	7,3	235,4	48,70	6,0	5,76
315,0	315,0	9,2	296,6	77,00	6,0	5,74
355,0	355,0	10,4	334,2	98,40	6,0	5,72
400,0	400,0	11,7	376,6	124,40	6,0	5,70

NOTAS:

- ▶ Normas de Fabricación: NTP ISO 4435
- ▶ Gama de diámetros: De 110 mm. a 400 mm.
- ▶ Sistema de Empalme: Unión Flexible (UF)
- ▶ Color: Anaranjado Marrón (Ocre)
- ▶ Campo de Aplicación: Recolección de aguas residuales y pluviales, drenaje.



Sistema de Gestión
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9108654509

