

CONTENTS

- 01 Rigid Steel Conduit
- 05 Rigid Conduit Elbows/Bends
- 10 Rigid Conduit Nipples
- 13 Rigid Conduit Coupling
- 15 Electrical Metallic Tubing
- 19 Color Electrical Metallic Tubing
- 20 EMT Elbows/Bends
- 25 BS/EN4568 Steel Conduit

GO Beyond Themselves
And Saied New Heights.



EAST CONDUIT WEIFANG EAST STEEL PIPE CO.,LTD.

➤ Rigid Steel Conduit

East Conduit's Hot Dip Galvanized Electrical Rigid Conduit (UL6) has excellent protection, strength, safety and ductility for your wiring works.

East Conduit Rigid is manufactured with high-strength steel, and produced by the electric resistance welding process.

East Conduit Rigid are zinc coated both inside and outside using hot dip galvanizing process , so that metal-to-metal contact and galvanic protection against corrosion are provided.

The surface of East Conduit Rigid with a clear post-galvanizing coating to provide further protection against corrosion. The interior surface provides a smooth continuous raceway for easy wire pulling. Our conduits ductility characteristics provide for easy bending, cutting, and threading in the field.

East Conduit Rigid is produced in normal trade sizes from 1/2" to 6" in standard lengths of 10 feet (3.05 m), including the coupling and color coded Plastic thread protector caps for quick identification of the conduit size. The rigid conduit is threaded on both ends, with a coupling applied to one end and a by size color coded thread protector to the other as per table.






Features and Benefits

Consistent Quality - We manufacture for long life; it is durable, strong, and suitable for harshest environmental conditions. The steel is welded to ensure quality standards are met. The inside surface of the pipe is obstruction-free and extra smooth, making wire pulling and pushing easy and reduced friction between wall and wire. The product is easy to cut, form and join.

Excellent ID smoothness - We manufacture the pipes with removing ID flash during pipe making and smooth out ID from zinc dross after galvanizing to provide excellent smoothness and more wire capacity together with no hassle with stripping wire.

Lower Life-cycle costs - East conduit resists cracking, flaking, peeling, impact, and damage from severe bending. Its physical and mechanical properties ensure that the pipe has an extended life cycle, great for usage or storage without trouble in quality.

Protection from Environmental Damage and Mechanical Use - the thorough inside and outside zinc coating of East Conduit provides enhanced, second to none corrosion protection.

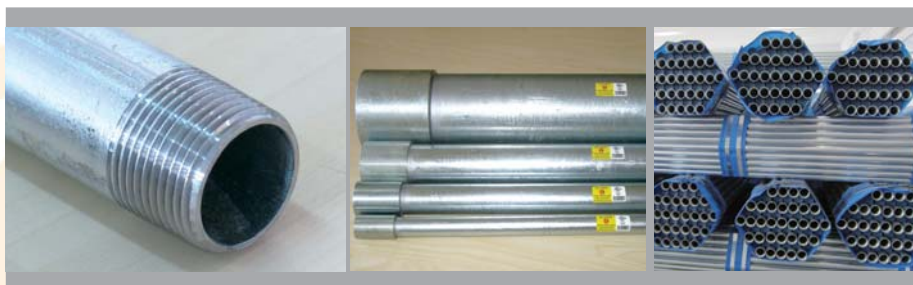

Specifications

East Conduit Rigid pipe is manufactured in accordance with the latest edition of the following:

- American National Standards Institute (ANSI®)
- American National Standard for Rigid Steel Tubing (ANSI®C80.1)
- Underwriters Laboratories Standard for Rigid Steel Tubing (UL6)
- National Electric Code®2002 Article 344 (1999 NEC Article 346)

Additional information on the titles and designations of standards or requirements that have been used for the investigation of products in a specific category can be found in the Underwriters Laboratories Inc.®, General Information for Electrical Equipment directory. The UL product category for Rigid Ferrous Metal Conduit is DYIX.

Dimension and Weight Chart (Rigid)

Trade Size		Nominal Wt. per 100Ft(30.5M)		Nominal Outside Diameter		Nominal Wall Thickness	
U.S.	Metric	Lbs	Kg	In.	mm	In.	mm
1/2	16	82	37.2	0.840	21.34	0.104	2.64
3/4	21	109	49.4	1.050	26.67	0.107	2.72
1	27	161	73.0	1.315	33.40	0.126	3.20
1-1/4	35	218	98.9	1.660	42.16	0.133	3.38
1-1/2	41	263	119	1.900	48.26	0.138	3.51
2	53	350	159	2.375	60.33	0.146	3.71
2-1/2	63	559	254	2.875	73.03	0.193	4.90
3	78	727	330	3.500	88.90	0.205	5.21
3-1/2	91	880	399	4.000	101.60	0.215	5.46
4	103	1030	467	4.500	114.30	0.225	5.72
5	129	1400	635	5.563	141.30	0.245	6.22
6	155	1840	835	6.625	168.28	0.266	6.76